


FC056-VD_4I.V7

Leistungsdaten Performance data

3~ 400V ±10% Δ/Y50Hz

P ₁	1,0/0,6	kW
I	1,8/0,95	A
n	1220/910	min ⁻¹
I _A	7,0/2,3	A
ΔI	0	%
C _{400V/Komp.*})	5	μF
t _R	60	°C

Kennliniendaten Characteristic data

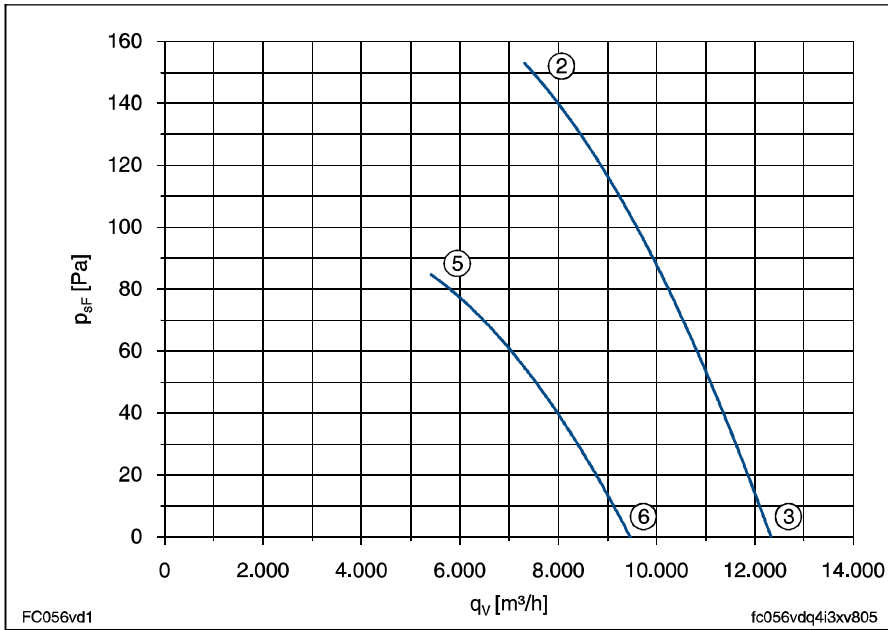

	U V	I A	P ₁ W	n min ⁻¹
②	400	1,8	1000	1220
③	Δ	1,6	870	1260
⑤	400	0,95	600	910
⑥	Y	0,88	550	970

$$p_{d2} = 7,7 \cdot 10^{-7} \cdot q_v^2$$

gemessen in Voldüse ohne Berührungsschutz in Einbauart A nach ISO 5801
measured in full bell mouth without guard grille in installation type A according to ISO 5801

*) Kompensationskondensator, siehe Allgemeine Hinweise/ Geräuschfilter
Compensation capacitor, see Technical description/ Noise filter

	②	③	⑤	⑥
L _{WA}	82	81	75	76
dB				

Maßblatt / Dimension sheet

Typ type	Artikel-Nr. article no.	Bauform design	Luftförderrichtung airflow direction	Gewicht weight	Anschlussschaltbild connection diagram	Maßblatt dimension sheet	Seite page
FC056-VDA.4I.V7	123 703	A	V	10,6 kg	108XA	L-KL-8791	4/2/31
FC056-VDQ.4I.V7	123 992	Q	V	21,0 kg	108XA	L-KL-8792	4/2/38