

FE2owlet


FN050-4E_.4I_.7P1

Leistungsdaten Performance data

1~ 230V ±10% 50Hz


P_1	0,75	kW
I	3,3	A
n	1230	min ⁻¹
I_A	7,1	A
ΔI	5	%
C_{400V}	16	μF
t_R	70	°C

Kennliniendaten Characteristic data

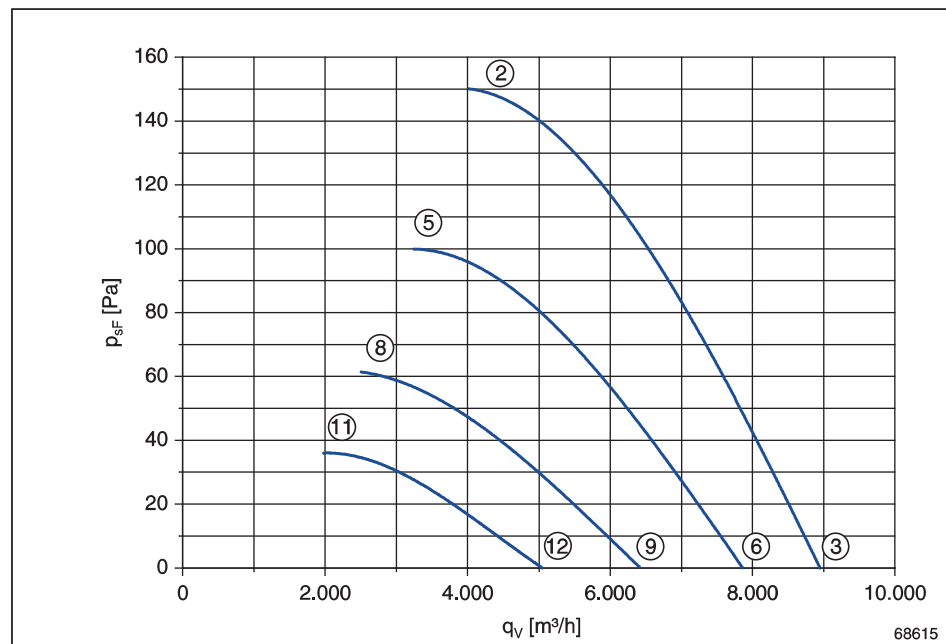

	U V	I A	P ₁ W	n min ⁻¹
②	230	3,3	750	1230
③		2,8	630	1310
⑤	170	3,4	560	1010
⑥		2,9	480	1160
⑧	135	3,1	410	790
⑨		2,8	370	950
⑪	110	2,7	280	600
⑫		2,6	270	750

$$p_{d2} = 1,2 \cdot 10^{-6} \cdot q_v^2$$

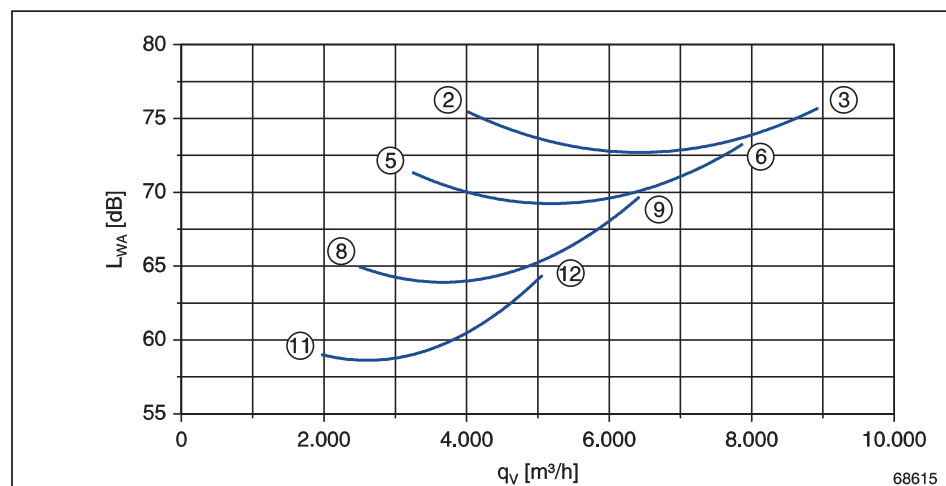

gemessen in Volldüse ohne
Berührschutz in Einbauart A
nach ISO 5801
measured in full bell mouth without
guard grille in installation type A
according to ISO 5801

Maßblatt / Dimension sheet

Typ Type	Artikel-Nr. Article no.	Bauform Design	Luftförderrichtung Airflow direction	Gewicht Weight	Anschlussschaltbild Connection diagram	Maßblatt Dimension sheet	Seite Page
FN050-4EA.4I.A7P1	140 080	A	A	11 kg	104XB	L-KL-2656	49
FN050-4EQ.4I.A7P1	140 084	Q	A	20 kg	104XB	L-KL-2660	50
FN050-4EA.4I.V7P1	140 429	A	V	11 kg	104XA	L-KL-2657	51
FN050-4EK.4I.V7P1	140 057	K	V	13 kg	104XA	L-KL-2659	52
FN050-4EQ.4I.V7P1	140 062	Q	V	18 kg	104XA	L-KL-2661	53
FN050-4EF.4I.V7P1	140 068	F*	V	17 kg	104XA	L-KL-2662	54
FN050-4EF.4I.V7P1	140 074	F**	V	18 kg	104XA	L-KL-2658	55

* ohne Berührschutz / without guard grille

** mit Berührschutz / with guard grille