


Motorlüfterrad einflutrig

Motorized impeller single inlet

RH56E-4DK.6N.1R

Art.Nr. mit seitlichem Anschlusskabel
 Art.no. with cable side

129 263




Leistungsdaten Performance data

3~ 400V ±10%
 50Hz IP54

Anschluss Schaltbild 106XA
 Connection diagram

P_1	2,5	kW
I	4,5	A
n	1320	min ⁻¹
I_A	18	A
ΔI	5	%
t_R	50	°C
m	29	kg

Kennliniendaten Characteristic data

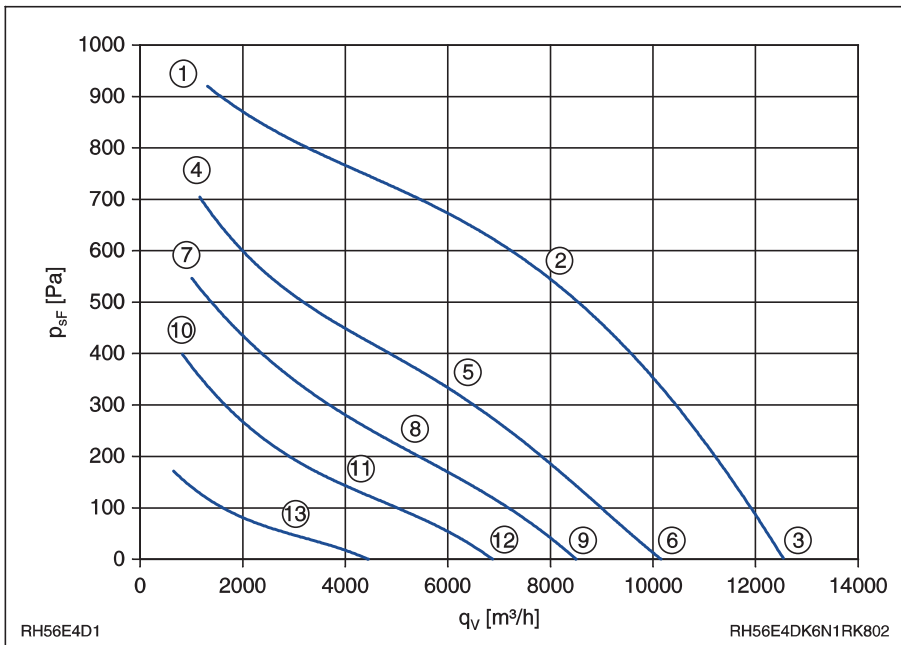

	U V	I A	P ₁ W	n min ⁻¹	L _{WA} dB
①		3,0	1400	1410	
②	400	4,5	2500	1320	81
③		4,0	2100	1360	88
④		3,2	1050	1230	
⑤	230	4,8	1600	1020	74
⑥		4,3	1450	1100	81
⑦		3,3	870	1090	
⑧	180	4,5	1150	850	69
⑨		4,2	1100	930	76
⑩		3,2	650	930	
⑪	140	4,0	780	690	64
⑫		3,9	770	760	70
⑬	90	2,8	340	450	

$$p_{d2} = 6,0 \cdot 10^{-7} \cdot q_v^2$$

